



## 3M™ Sun Control Window Film Silver 35 Exterior

- Metalised heat gain reduction technology
- Keeps occupants cool and comfortable
- Reduces heating and cooling costs
- Abrasion resistant surface to maintain good appearance longer
- Extends the life and vibrancy in furniture, fittings and fabrics
- Reduces the risk of injury from flying glass


# 3M™ Sun Control Window Film Silver 35 Exterior

## Description

**3M Sun Control Window Films** are an elegant way to manage light and heat. 3M technology can significantly reduce heat gain and create a comfortable environment, especially in warmer months, as well as helping to reduce the workload of air conditioners and save energy costs. 3M Window Films also reduce glare and block almost the entire amount of UVA and UVB rays which are the main cause of fading and skin damage.

**3M's Silver 35 Exterior** is designed for use on the exterior surface of windows. It's metalised technology reflects the sun's rays while allowing optical clarity to be maintained and rejects excess light to reduce glare. Also, depending on lighting conditions, rooms are protected against prying eyes from looking in.

## Solar Performance and light transmission

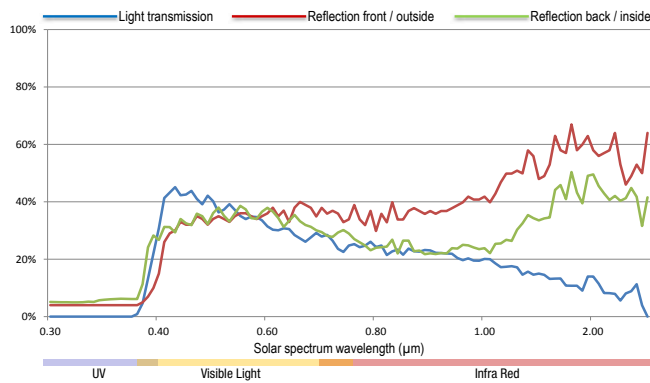

## Features (on 6 mm clear glass)

Total Solar Energy Rejected	63%
Glare reduction	61%
UV rays blocked	99%

## Film properties

Thickness	0.065mm / 65µm
Colour	Silver
Material	Polyester
Adhesive	Pressure sensitive acrylic
Top coating	Scratch resistant hard coat

## Installation

Exterior 3M Window Films are installed using a water and soap solution. Full adhesion is reached after approximately 20 days at 18°C (in dry conditions). Edge sealing is required, 3M recommended 3M™ Marine Sealant 3200.

## Cleaning

3M Window Films may be cleaned 30 days after installation using ordinary window cleaning agents and avoiding the use of abrasive particles. Do not use rough sponges, cloths or brushes. Synthetic sponges, soft wipes or rubber squeegee cleaners are recommended.

Glass Type	Film Type on 6mm Glass	Visible Light Transmission	Visible Reflection Exterior	Visible Reflection Interior	Heat Gain Reduction	G-value (Solar Heat Gain Coefficient)	Total Solar Energy Rejected
<b>Single Pane</b>							
Clear	No film	89%	8%	9%	N/A	0.82	18%
	<b>Silver 35 Ext.</b>	<b>35%</b>	<b>35%</b>	<b>36%</b>	<b>56%</b>	<b>0.36</b>	<b>64%</b>
Tinted	No film	53%	6%	6%	N/A	0.63	37%
	<b>Silver 35 Ext.</b>	<b>21%</b>	<b>35%</b>	<b>16%</b>	<b>59%</b>	<b>0.29</b>	<b>71%</b>
<b>Double Pane</b>							
Clear	No film	79%	15%	15%	N/A	0.70	30%
	<b>Silver 35 Ext.</b>	<b>32%</b>	<b>36%</b>	<b>37%</b>	<b>59%</b>	<b>0.29</b>	<b>71%</b>
Tinted	No film	47%	8%	13%	N/A	0.51	49%
	<b>Silver 35 Ext.</b>	<b>19%</b>	<b>35%</b>	<b>21%</b>	<b>57%</b>	<b>0.22</b>	<b>78%</b>

The technical information, recommendations and other statements contained in this document are based upon European and/ or US tests or experience that 3M believes are reliable, but the accuracy or completeness of such information is not guaranteed. Many factors beyond 3M's control and uniquely within the user's knowledge and control can affect the use and performance of a 3M product in a particular application. Given the variety of factors that can affect the use and performance of a 3M product, the user is solely responsible for evaluating the 3M product and determining whether it is fit for a particular purpose and suitable for user's method of application. The information provided in this report is believed to be reliable; however, due to the wide variety of intervening factors, 3M does not warrant that the results will necessarily be obtained. All issues regarding warranty and liability for the product and the effect of its use are governed in accordance with the provisions of the appropriate contract of sale unless local laws dictate otherwise.



**Renewable Energy Division**  
**3M United Kingdom plc**  
 3M Centre  
 Cain Road, Bracknell  
 Berkshire RG12 8HT  
 3M.eu/WindowFilm

Please recycle.  
 © 3M 2013. All rights reserved.